



**Model: 29460E**

Basic size of  
 mm


d:	300
D:	540
H:	145

The basic rated load is  
 kN

trends C:	4310
static state Co:	16600
Fatigue load limit, Pu:	1340
Minimum load coefficient, A:	26

Rated rotation speed is  
 r/min


Refer to the speed:	600
limit speed:	1200
quality kg:	140
model:	29460 E

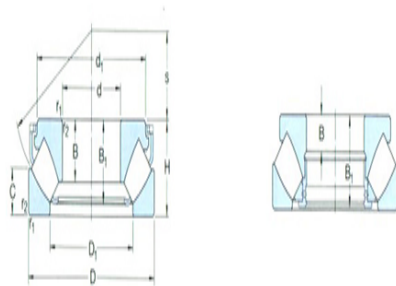

6.8.8

Dimensions are  
 mm

d:	300
d <sub>1</sub> ~ :	485
D <sub>1</sub> ~ :	392
B:	95
B <sub>1</sub> :	130.3
C:	70.5
r <sub>1,2</sub> the min:	6
s:	175

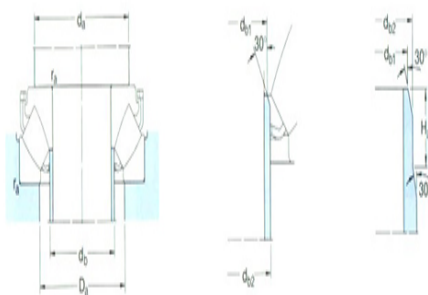

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	415
d <sub>b1</sub> the max:	319
d <sub>b2</sub> the max:	340
H <sub>a</sub> the min:	-
Da the max:	465

