



### Model: 29264

Basic size of  
mm


|    |     |
|----|-----|
| d: | 320 |
| D: | 440 |
| H: | 73  |

The basic rated load is  
kN

|                              |      |
|------------------------------|------|
| trends C:                    | 1110 |
| static state Co:             | 5100 |
| Fatigue load limit, Pu:      | 465  |
| Minimum load coefficient, A: | 2.5  |

Rated rotation speed is  
r/min


|                     |           |
|---------------------|-----------|
| Refer to the speed: | 850       |
| limit speed:        | 1400      |
| quality kg:         | 33        |
| model:              | 2926<br>4 |

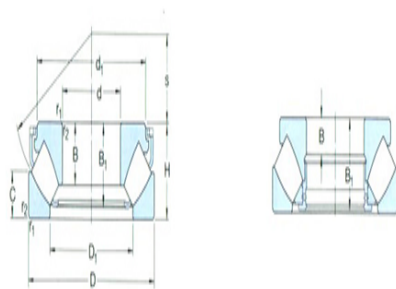

6.8.8

Dimensions are  
mm

|                           |     |
|---------------------------|-----|
| d:                        | 320 |
| d <sub>1</sub> ~ :        | 430 |
| D1 ~ :                    | 372 |
| B:                        | 21  |
| B <sub>1</sub> :          | 69  |
| C:                        | 38  |
| r <sub>1,2</sub> the min: | 3   |
| s:                        | 172 |

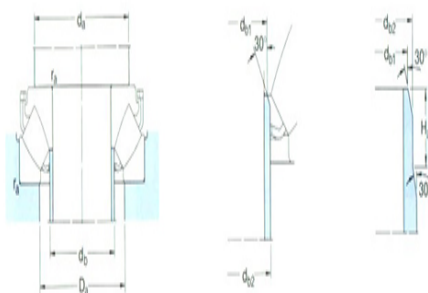

Shoulder gear and chamfer size  
mm

|                          |     |
|--------------------------|-----|
| d <sub>a</sub> the min:  | 380 |
| d <sub>b1</sub> the max: | -   |
| d <sub>b2</sub> the max: | -   |
| H <sub>a</sub> the min:  | -   |
| D <sub>a</sub> the max:  | 400 |

$r_a$  the max:

2.5