



Model: 29464E

Basic size of
 mm


d:	320
D:	580
H:	155

The basic rated load is
 kN


trends C:	4950
static state Co:	19000
Fatigue load limit, Pu:	1530
Minimum load coefficient, A:	34

Rated rotation speed is
 r/min

Refer to the speed:	560
limit speed:	1100
quality kg:	175
model:	29464 E

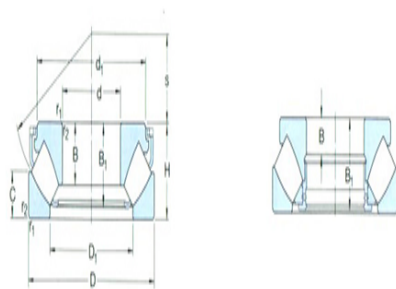

6.8.8

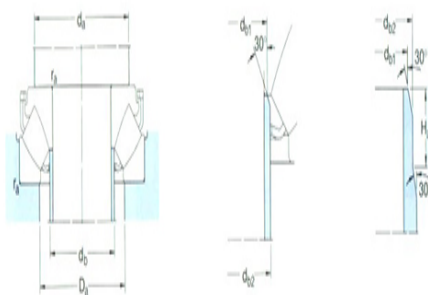

Dimensions are
 mm

d:	320
d ₁ ~ :	520.3
D ₁ ~ :	422
B:	102
B ₁ :	139.4
C:	74.5
r _{1,2} the min:	7.5
s:	191

Shoulder gear and chamfer size
 mm

d _a the min:	450
d _{b1} the max:	344
d _{b2} the max:	367
H _a the min:	-
Da the max:	500

