



Model: 29268

Basic size of
mm


d:	340
D:	460
H:	73

The basic rated load is
kN


trends C:	1130
static state Co:	5400
Fatigue load limit, Pu:	480
Minimum load coefficient, A:	2.8

Rated rotation speed is
r/min

Refer to the speed:	850
limit speed:	1300
quality kg:	33.5
model:	2926 8

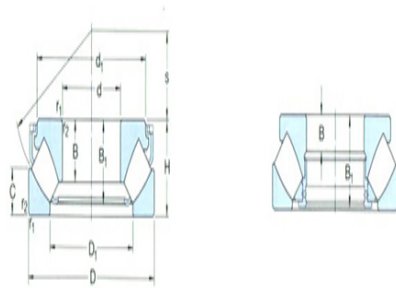

6.8.8

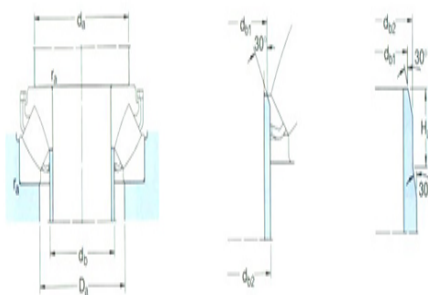

Dimensions are
mm

d:	340
d ₁ ~ :	445
D ₁ ~ :	395
B:	21
B ₁ :	69
C:	37.5
r _{1,2} the min:	3
s:	183

Shoulder gear and chamfer size
mm

d _a the min:	400
d _{b1} the max:	-
d _{b2} the max:	-
H _a the min:	-
Da the max:	422

r_a the max:

2.5