



**Model: 29368**

Basic size of  
 mm


d:	340
D:	540
H:	122

The basic rated load is  
 kN


trends C:	2710
static state Co:	1100
	0
Fatigue load limit, Pu:	950
Minimum load coefficient, A:	11

Rated rotation speed is  
 r/min

Refer to the speed:	600
limit speed:	1100
quality kg:	105
model:	2936
	8

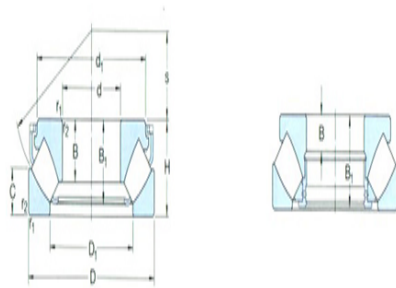

6.8.8.11

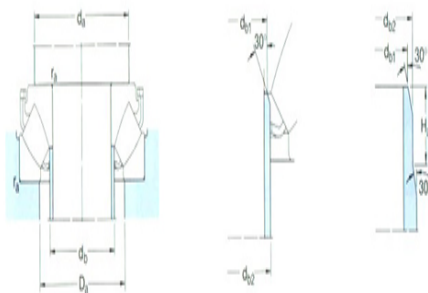

Dimensions are  
 mm

d:	340
d <sub>1</sub> ~ :	520
D1 ~ :	428
B:	40.6
B <sub>1</sub> :	117
C:	59.5
r <sub>1,2</sub> the min:	5
s:	192

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	440
d <sub>b1</sub> the max:	-
d <sub>b2</sub> the max:	-
H <sub>a</sub> the min:	-
Da the max:	479

