



Model: 29468E

Basic size of
mm


d:	340
D:	620
H:	170

The basic rated load is
kN

trends C:	5750
static state Co:	22400
Fatigue load limit, Pu:	1760
Minimum load coefficient, A:	48

Rated rotation speed is
r/min


Refer to the speed:	500
limit speed:	1000
quality kg:	220
model:	29468 E

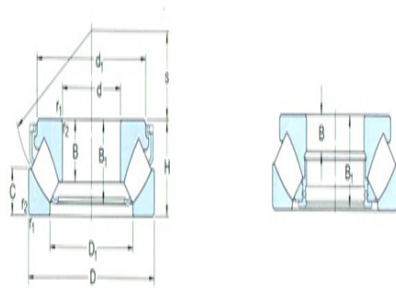

6.8.8

Dimensions are
mm

d:	340
d ₁ ~ :	557.9
D ₁ ~ :	445
B:	112
B ₁ :	151.4
C:	84
r _{1,2} the min:	7.5
s:	201

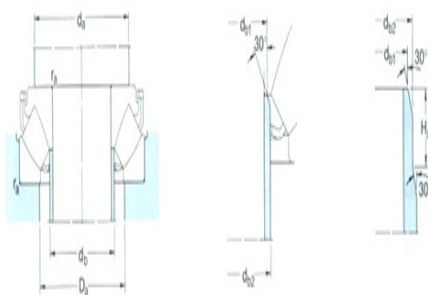

Shoulder gear and chamfer size
mm

d _a the min:	475
d _{b1} the max:	363
d _{b2} the max:	386
H _a the min:	-
Da the max:	530

