



**Model: 29488EM**

Basic size of  
mm


d:	440
D:	780
H:	206

The basic rated load is  
kN

trends C:	7820
static state Co:	32000
Fatigue load limit, Pu:	2320
Minimum load coefficient, A:	87

Rated rotation speed is  
r/min

Refer to the speed:	380
limit speed:	750
quality kg:	410
model:	29488E M

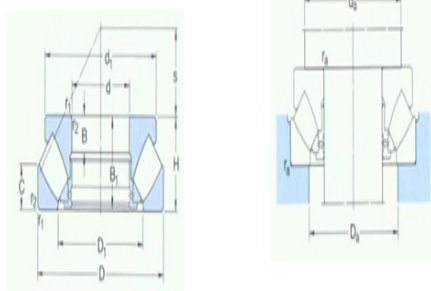

Dimensions are  
mm

d:	440
d <sub>1</sub> ~ :	710
D <sub>1</sub> ~ :	577
B:	77
B <sub>1</sub> :	199
C:	101
r <sub>1,2</sub> the min:	9.5
s:	257

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	605
D <sub>a</sub> the max:	675
r <sub>a</sub> the max:	8