



Model: 29296

Basic size of
mm


d:	480
D:	650
H:	103

The basic rated load is
kN

trends C:	2350
static state Co:	1180
	0
Fatigue load limit, Pu:	950
Minimum load coefficient, A:	13

Rated rotation speed is
r/min

Refer to the speed:	560
limit speed:	900
quality kg:	98
model:	2929
	6

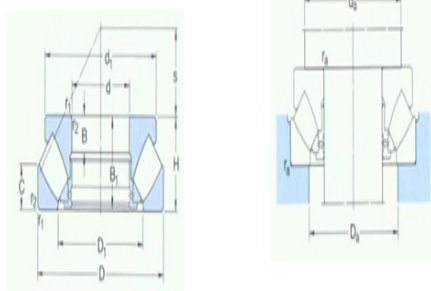

Dimensions are
mm

d:	480
d ₁ ~ :	635
D ₁ ~ :	556
B:	33
B ₁ :	99
C:	53.5
r _{1,2} the min:	5
s:	259

Shoulder gear and chamfer size
mm

d _a the min:	570
Da the max:	595
r _a the max:	4