



Model: 294/500EM

Basic size of
mm


d:	500
D:	870
H:	224

The basic rated load is
kN

trends C:	9370
static state Co:	40000
Fatigue load limit, Pu:	2850
Minimum load coefficient, A:	150

Rated rotation speed is
r/min

Refer to the speed:	340
limit speed:	670
quality kg:	560
model:	294/500E M

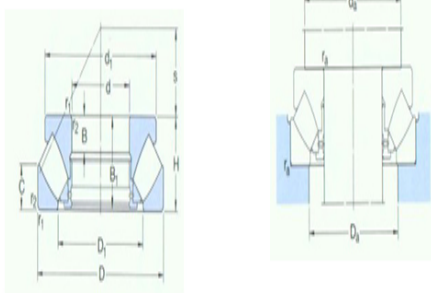

Dimensions are
mm

d:	500
d ₁ ~ :	795
D1 ~ :	648
B:	86
B ₁ :	216
C:	110
r _{1,2} the min:	9.5
s:	290

Shoulder gear and chamfer size
mm

d _a the min:	685
Da the max:	755
r _a the max:	8