



**Model: 294/670EM**

Basic size of  
mm


d:	670
D:	1150
H:	290

The basic rated load is  
kN

trends C:	15400
static state Co:	68000
Fatigue load limit, Pu:	4500
Minimum load coefficient, A:	440

Rated rotation speed is  
r/min

Refer to the speed:	240
limit speed:	450
quality kg:	1210
model:	294/670E M

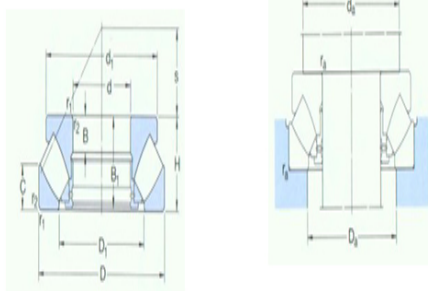

Dimensions are  
mm

d:	670
d <sub>1</sub> ~ :	1045
D <sub>1</sub> ~ :	864
B:	110
B <sub>1</sub> :	280
C:	141
r <sub>1,2</sub> the min:	15
s:	387

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	905
Da the max:	1000
r <sub>a</sub> the max:	12