



**Model: 293/800**

Basic size of  
mm


d:	800
D:	1180
H:	230

The basic rated load is  
kN

trends C:	9950
static state Co:	49000
Fatigue load limit, Pu:	3250
Minimum load coefficient, A:	230

Rated rotation speed is  
r/min

Refer to the speed:	240
limit speed:	450
quality kg:	865
model:	293/800
	0

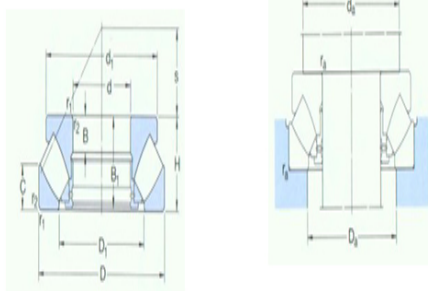

Dimensions are  
mm

d:	800
d <sub>1</sub> ~ :	1146
D <sub>1</sub> ~ :	965
B:	77
B <sub>1</sub> :	222
C:	111
r <sub>1,2</sub> the min:	9.5
s:	440

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	995
Da the max:	1060
r <sub>a</sub> the max:	8