



Model: 294/950EF

Basic size of
mm


d:	950
D:	1600
H:	390

The basic rated load is
kN

trends C:	28200
static state Co:	132000
Fatigue load limit, Pu:	7800
Minimum load coefficient, A:	1700

Rated rotation speed is
r/min

Refer to the speed:	140
limit speed:	280
quality kg:	3065
model:	294/950E F

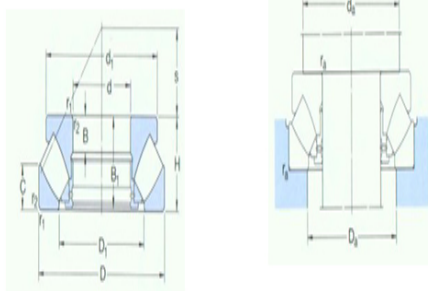

Dimensions are
mm

d:	950
d ₁ ~ :	1470
D ₁ ~ :	1209
B:	153
B ₁ :	377
C:	191
r _{1,2} the min:	15
s:	546

Shoulder gear and chamfer size
mm

d _a the min:	1275
Da the max:	1400
r _a the max:	12