



**Model: 292/1060EF**

Basic size of  
mm


d:	1060
D:	1400
H:	206

The basic rated load is  
kN

trends C:	10500
static state Co:	58500
Fatigue load limit, Pu:	3750
Minimum load coefficient, A:	330

Rated rotation speed is  
r/min

Refer to the speed:	220
limit speed:	360
quality kg:	860
model:	292/1060E F

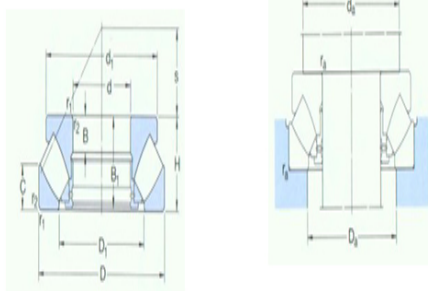

Dimensions are  
mm

d:	1060
d <sub>1</sub> ~ :	1325
D1 ~ :	1211
B:	66
B <sub>1</sub> :	199
C:	100
r <sub>1,2</sub> the min:	9.5
s:	566

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	1225
Da the max:	1290
r <sub>a</sub> the max:	8