



Model: 294/1060EF

Basic size of
mm


| | |
|----|------|
| d: | 1060 |
| D: | 1770 |
| H: | 426 |

The basic rated load is
kN

| | |
|------------------------------|--------|
| trends C: | 33400 |
| static state Co: | 156000 |
| Fatigue load limit, Pu: | 8500 |
| Minimum load coefficient, A: | 2300 |

Rated rotation speed is
r/min

| | |
|---------------------|----------------|
| Refer to the speed: | 120 |
| limit speed: | 240 |
| quality kg: | 4280 |
| model: | 294/1060E F |

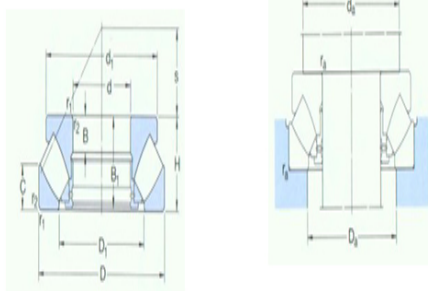

Dimensions are
mm

| | |
|---------------------------|------|
| d: | 1060 |
| d ₁ ~ : | 1615 |
| D1 ~ : | 1349 |
| B: | 192 |
| B ₁ : | 412 |
| C: | 207 |
| r _{1,2} the min: | 15 |
| s: | 610 |

Shoulder gear and chamfer size
mm

| | |
|-------------------------|------|
| d _a the min: | 1410 |
| Da the max: | 1555 |
| r _a the max: | 12 |