



**Model: 292/1180EF**

Basic size of  
mm


d:	1180
D:	1520
H:	206

The basic rated load is  
kN

trends C:	10900
static state Co:	64000
Fatigue load limit, Pu:	3750
Minimum load coefficient, A:	390

Rated rotation speed is  
r/min

Refer to the speed:	220
limit speed:	340
quality kg:	950
model:	292/1180E F

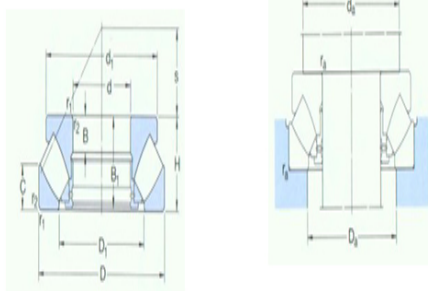

Dimensions are  
mm

d:	1180
d <sub>1</sub> ~ :	1450
D1 ~ :	1331
B:	83
B <sub>1</sub> :	199
C:	101
r <sub>1,2</sub> the min:	9.5
s:	625

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	1345
Da the max:	1410
r <sub>a</sub> the max:	8