



Model: 293/1250EF

Basic size of
mm


d:	1250
D:	1800
H:	330

The basic rated load is
kN

trends C:	24800
static state Co:	129000
Fatigue load limit, Pu:	7500
Minimum load coefficient, A:	1600

Rated rotation speed is
r/min

Refer to the speed:	130
limit speed:	240
quality kg:	2770
model:	293/1250E F

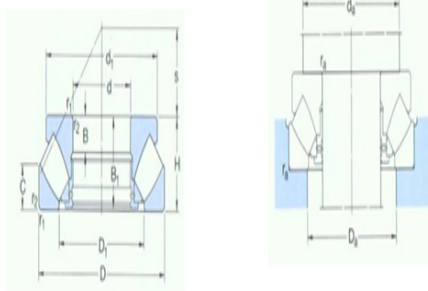

Dimensions are
mm

d:	1250
d ₁ ~ :	1685
D ₁ ~ :	1474
B:	148
B ₁ :	319
C:	161
r _{1,2} the min:	12
s:	698

Shoulder gear and chamfer size
mm

d _a the min:	1540
Da the max:	1640
r _a the max:	10