



**Model: 293/1600EF**

Basic size of  
mm


d:	1600
D:	2280
H:	408

The basic rated load is  
kN

trends C:	36800
static state Co:	200000
Fatigue load limit, Pu:	11800
Minimum load coefficient, A:	3800

Rated rotation speed is  
r/min

Refer to the speed:	90
limit speed:	160
quality kg:	5375
model:	293/1600E F

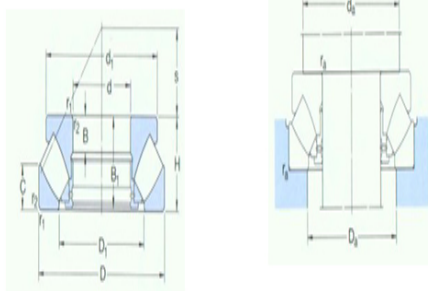

Dimensions are  
mm

d:	1600
d <sub>1</sub> ~ :	2130
D <sub>1</sub> ~ :	1885
B:	166
B <sub>1</sub> :	395
C:	195
r <sub>1,2</sub> the min:	19
s:	894

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	1955
Da the max:	2090
r <sub>a</sub> the max:	15