

**Model: 6004-
 2RSLTN9/HC5C3WT**

Basic size of
 mm


| | |
|----|----|
| d: | 20 |
| D: | 42 |
| B: | 12 |

The basic rated load is
 kN

| | |
|----------------------------|-------|
| trends C: | 9.95 |
| static state Co: | 5 |
| Fatigue load limit, Pu: | 0.212 |

Rated rotation speed is
 r/min

| | |
|------------------------|---------------------|
| Refer to the speed: | 48000 |
| limit speed: | 32000 |
| quality kg: | 0.062 |
| 6004- model: | 2RSLTN9/HC5C3W T |

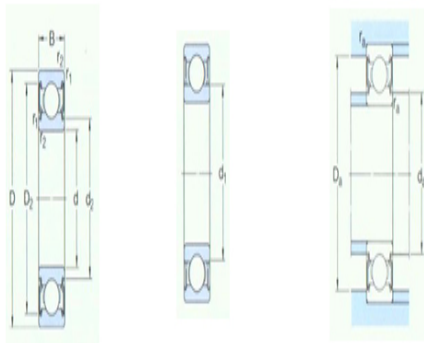

Dimensions are
 mm

| | |
|---------------------------|------|
| d: | 20 |
| d ₁ ~ : | - |
| d ₂ ~ : | 24.9 |
| D ₂ ~ : | 37.2 |
| r _{1,2} the min: | 0.6 |

Shoulder gear and chamfer size
 mm

| | |
|-------------------------|------|
| d _a the min: | 23.2 |
| d _a the max: | 24.5 |
| Da the max: | 38.8 |
| r _a the max: | 0.6 |

Calculation coefficient

| | |
|-----|----|
| fo: | 14 |
|-----|----|

