

**Model: 6005-
2RSLTN9/HC5C3WT**

Basic size of
mm


| | |
|----|----|
| d: | 25 |
| D: | 47 |
| B: | 12 |

The basic rated load is
kN

| | |
|----------------------------|-------|
| trends C: | 11.9 |
| static state Co: | 6.55 |
| Fatigue load limit, Pu: | 0.275 |

Rated rotation speed is
r/min

| | |
|------------------------|---------------------|
| Refer to the speed: | 40000 |
| limit speed: | 28000 |
| quality kg: | 0.073 |
| 6005- model: | 2RSLTN9/HC5C3W T |

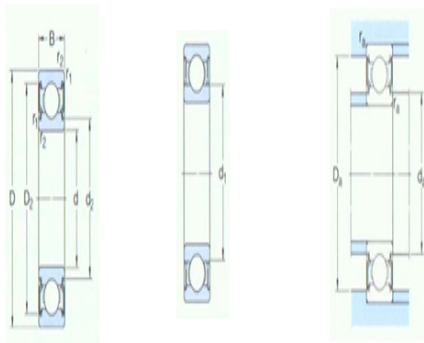

Dimensions are
mm

| | |
|---------------------------|------|
| d: | 25 |
| d ₁ ~ : | - |
| d ₂ ~ : | 29.7 |
| D ₂ ~ : | 42.2 |
| r _{1,2} the min: | 0.6 |

Shoulder gear and chamfer size
mm

| | |
|-------------------------|------|
| d _a the min: | 28.2 |
| d _a the max: | 29.5 |
| Da the max: | 43.8 |
| r _a the max: | 0.6 |

Calculation coefficient

| | |
|-----|----|
| fo: | 14 |
|-----|----|

