

**Model: 6207-  
 2RZTN9/HC5C3WT**

Basic size of  
 mm


|    |    |
|----|----|
| d: | 35 |
| D: | 72 |
| B: | 17 |

The basic rated load is  
 kN

|                         |       |
|-------------------------|-------|
| trends C:               | 27    |
| static state Co:        | 15.3  |
| Fatigue load limit, Pu: | 0.655 |

Rated rotation speed is  
 r/min

|                     |                             |
|---------------------|-----------------------------|
| Refer to the speed: | 28000                       |
| limit speed:        | 18000                       |
| quality kg:         | 0.26                        |
| model:              | 6207-<br>2RZTN9/HC5C3W<br>T |

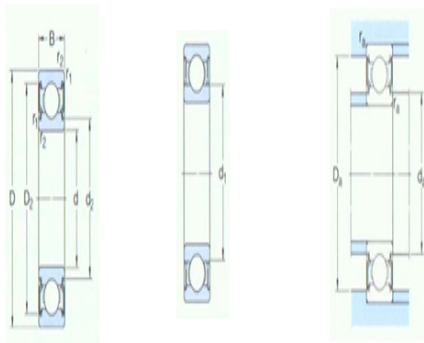

Dimensions are  
 mm

|                           |      |
|---------------------------|------|
| d:                        | 35   |
| d <sub>1</sub> ~ :        | 46.9 |
| d <sub>2</sub> ~ :        | -    |
| D <sub>2</sub> ~ :        | 62.7 |
| r <sub>1,2</sub> the min: | 1.1  |

Shoulder gear and chamfer size  
 mm

|                         |    |
|-------------------------|----|
| d <sub>a</sub> the min: | 42 |
| d <sub>a</sub> the max: | -  |
| Da the max:             | 65 |
| r <sub>a</sub> the max: | 1  |

Calculation coefficient

|     |    |
|-----|----|
| fo: | 14 |
|-----|----|