

**Model: 6008-  
2RZTN9/HC5C3WT**

Basic size of  
mm


d:	40
D:	68
B:	15

The basic rated load is  
kN

trends C:	17.8
static state Co:	11.6
Fatigue load limit, Pu:	0.49

Rated rotation speed is  
r/min

Refer to the speed:	28000
limit speed:	18000
quality kg:	0.19
model:	6008- 2RZTN9/HC5C3W T

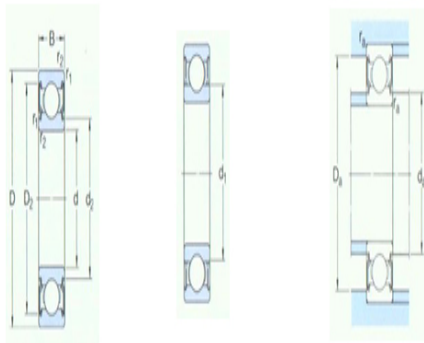

Dimensions are  
mm

d:	40
d <sub>1</sub> ~ :	49.3
d <sub>2</sub> ~ :	-
D <sub>2</sub> ~ :	61.1
r <sub>1,2</sub> the min:	1

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	44.6
d <sub>a</sub> the max:	-
Da the max:	63.4
r <sub>a</sub> the max:	1

Calculation coefficient

fo:	15
-----	----