



**Model: BMB-6204/048S2/EA002A**

**basic size**



d:	20
D:	47
B:	14

**Basic rated load**

trends C:	13.5
static state Co:	6.55
Fatigue load limit Pu:	0.28
limit speed:	10000

**Sensor**

Pulse number:	48
Cycle accuracy:	$\pm 3$
Phase shift accuracy:	$90 \pm 30$
quality:	0.15
model:	BMB-6204/048S2/EA002A

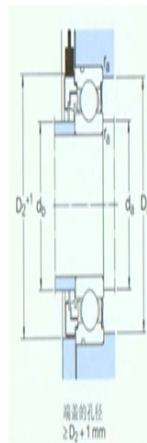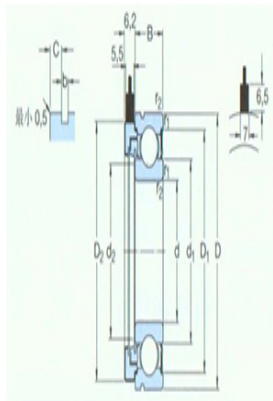

**size**

d:	20
$d_1 \approx$ :	28.5
$d_2$ :	26.4
$D_1 \approx$ :	40.6
$D_2$ :	46.4
b:	1.35
C:	2.06

**Shoulder gear and chamfer size**

$r_{1,2}$ the min:	1
$d_a$ the min:	25
$d_b$ the min:	25

$d_b$  the max: 26.3

$D_a$  the max: 42

end-play

$r_a$  the max: 1

the min: 13

the max: 28