





**Model: BMB-6205/048S2/EA002A**

**basic size**

d:	25
D:	52
B:	15

**Basic rated load**

trends C:	14.8
static state Co:	7.8
Fatigue load limit Pu:	0.34
limit speed:	8500

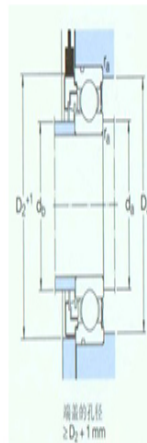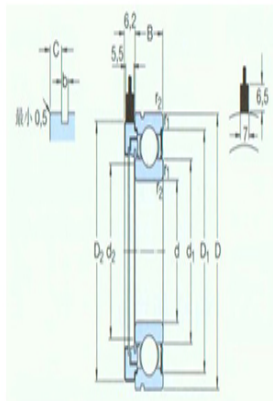

**Sensor**

Pulse number:	48
Cycle accuracy:	±3
Phase shift accuracy:	90±30
quality:	0.18
model:	BMB-6205/048S2/EA002A

**size**

d:	25
d <sub>1</sub> ≈:	34
d <sub>2</sub> :	31.8
D <sub>1</sub> ≈:	46.3
D <sub>2</sub> :	51.4
b:	1.35
C:	2.46

**Shoulder gear and chamfer size**

r <sub>1,2</sub> the min:	1
d <sub>a</sub> the min:	30
d <sub>b</sub> the min:	30

$d_b$  the max: 31.5

$D_a$  the max: 47

end-play

$r_a$  the max: 1

the min: 13

the max: 28