



Model: BMB-6206/064S2/EA002A

basic size



d:	30
D:	62
B:	16

Basic rated load

trends C:	20.3
static state Co:	11.2
Fatigue load limit Pu:	0.48
limit speed:	7500

Sensor

Pulse number:	64
Cycle accuracy:	± 4
Phase shift accuracy:	90 ± 45
quality:	0.22
model:	BMB-6206/064S2/EA002A

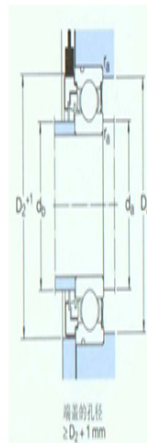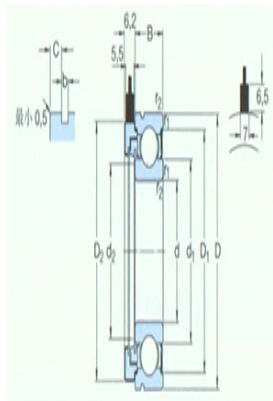

size

d:	30
d ₁ ≈:	40.3
d ₂ :	37.8
D ₁ ≈:	54.1
D ₂ :	58
b:	1.9
C:	3.28

Shoulder gear and chamfer size

r _{1,2} the min:	1
d _a the min:	35
d _b the min:	35

d_b the max: 37.5

D_a the max: 57

end-play

r_a the max: 1

the min: 13

the max: 28