





Model: BMB-6208/080S2/EB002A

basic size

d:	40
D:	80
B:	18

Basic rated load

trends C:	32.5
static state Co:	19
Fatigue load limit Pu:	0.8
limit speed:	5600

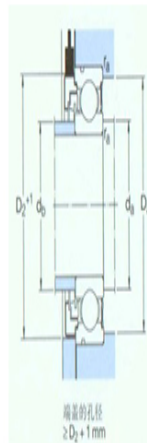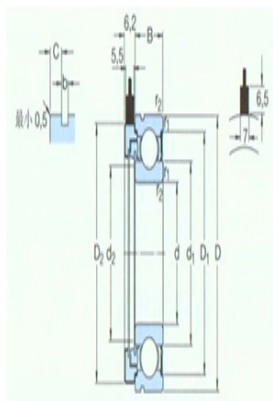

Sensor

Pulse number:	80
Cycle accuracy:	±5
Phase shift accuracy:	90±45
quality:	0.4
model:	BMB-6208/080S2/EB002A

size

d:	40
d ₁ ≈:	52.6
d ₂ :	48
D ₁ ≈:	69.8
D ₂ :	75
b:	1.9
C:	3.28

Shoulder gear and chamfer size

r _{1,2} the min:	1.1
d _a the min:	46.5
d _b the min:	46.5

d_b the max: 47.5

D_a the max: 73.5

end-play

r_a the max: 1

the min: 15

the max: 33