



**Model: SNL508TND**

diameter of axle

|         |    |
|---------|----|
| $d_a$ : | 35 |
|---------|----|

bearing block

|          |     |
|----------|-----|
| A:       | 85  |
| $A_1$ :  | 60  |
| H:       | 108 |
| $H_1$ :  | 60  |
| $H_2$ :  | 25  |
| J:       | 170 |
| L:       | 205 |
| N:       | 20  |
| $N_1$ :  | 15  |
| G:       | 12  |
| quality: | 2.9 |



双唇密封  
G型

迷宫式密封  
S型

Taconite密封  
NO型

model

|  |                 |
|--|-----------------|
| Bearing seat with seals on both sides: | SNL508TN<br>D   |
| Component bearing seat:                | SNL508-<br>607  |
| seal components:                       | TSN508ND        |
| end cap:                               | ASNH508-<br>607 |

diameter of axle

|         |  |
|---------|--|
| $d_a$ : |  |
|---------|--|

Hole


|         |  |
|---------|--|
| $C_a$ : |  |
| $D_a$ : |  |

Total width of the attached seal

|         |  |
|---------|--|
| $A_2$ : |  |
| $A_3$ : |  |

Applicable bearings and related parts

|                                  |
|----------------------------------|
| Automatic centering ball bearing |
| spherical roller                 |

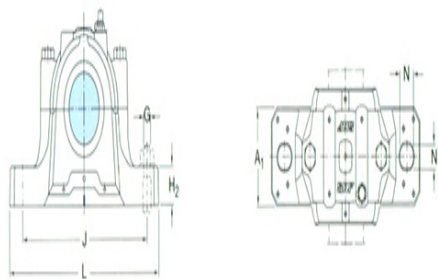

bearing:

tapered adapter-  
sleeve:

Positioning rings  
2 per bearing seat  
:

Automatic centering  
ball bearing  
spherical roller bearing  
CARB bearing:

tapered adapter-  
sleeve:

Positioning rings  
2 per bearing seat  
: