



Model: SNL617TS

diameter of axle

| | |
|---------|----|
| d_a : | 75 |
|---------|----|

bearing block

| | |
|----------|------|
| A: | 160 |
| A_1 : | 110 |
| H: | 218 |
| H_1 : | 112 |
| H_2 : | 40 |
| J: | 320 |
| L: | 380 |
| N: | 32 |
| N_1 : | 26 |
| G: | 24 |
| quality: | 17.6 |

model

| | |
|--|-----------------|
| Bearing seat with seals on both sides: | SNL617T S |
| Component bearing seat: | SNL520- 617 |
| seal components: | TSN617S |
| end cap: | ASNH52 0-617 |

diameter of axle

| | |
|---------|--|
| d_a : | |
|---------|--|

Hole


| | |
|---------|--|
| C_a : | |
| D_a : | |

Total width of the attached seal

| | |
|---------|--|
| A_2 : | |
| A_3 : | |

Applicable bearings and related parts

| | |
|----------------------------------|--|
| Automatic centering ball bearing | |
| spherical roller bearing: | |

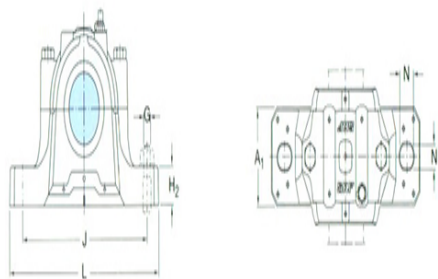

tapered adapter-sleeve :

Positioning rings

2 per bearing seat

:

Automatic centering ball
bearing

spherical roller bearing

CARB bearing:

tapered adapter-sleeve :

Positioning rings

2 per bearing seat

: