



**Model: SNL516-613**

diameter of axle

|         |    |
|---------|----|
| $d_a$ : | 60 |
|---------|----|

bearing block

|          |     |
|----------|-----|
| A:       | 120 |
| $A_1$ :  | 90  |
| H:       | 177 |
| $H_1$ :  | 95  |
| $H_2$ :  | 32  |
| J:       | 260 |
| L:       | 315 |
| N:       | 28  |
| $N_1$ :  | 22  |
| G:       | 20  |
| quality: | 9.5 |

model

|  |             |
|--|-------------|
| Bearing seat with seals on both sides: | SNL613TN D  |
| Component bearing seat:                | SNL516-613  |
| seal components:                       | TSN613ND    |
| end cap:                               | ASNH516-613 |

diameter of axle

|         |    |
|---------|----|
| $d_a$ : | 65 |
|---------|----|

Hole



|         |     |
|---------|-----|
| $C_a$ : | 56  |
| $D_a$ : | 130 |

Total width of the attached seal

|         |     |
|---------|-----|
| $A_2$ : | 127 |
| $A_3$ : | 175 |

Applicable bearings and related parts

|                                  |   |
|----------------------------------|---|
| Automatic centering ball bearing | - |
| spherical roller                 | - |

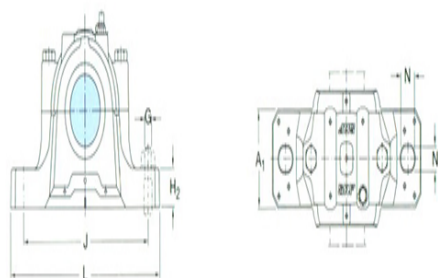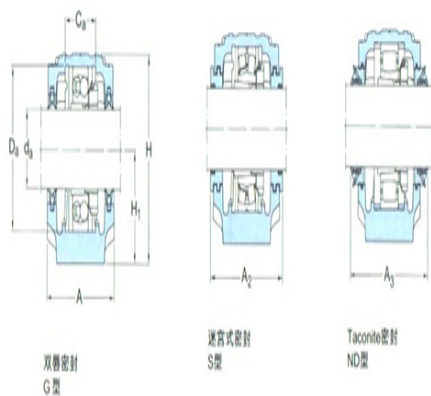

|                          |            |
|--------------------------|------------|
| bearing:                 |            |
| tapered adapter-sleeve:  | -          |
| Positioning rings        |            |
| 2 per bearing seat       | -          |
| :                        |            |
| Automatic centering      |            |
| ball bearing             | 22215EK    |
| spherical roller bearing |            |
| CARB bearing:            |            |
| tapered adapter-sleeve:  | H315       |
| Positioning rings        | FRB12.5/13 |
| 2 per bearing seat       | 0          |
| :                        |            |