




**Model: SNL517**

diameter of axle

|         |    |
|---------|----|
| $d_a$ : | 75 |
|---------|----|

bearing block

|          |     |
|----------|-----|
| A:       | 125 |
| $A_1$ :  | 90  |
| H:       | 183 |
| $H_1$ :  | 95  |
| $H_2$ :  | 32  |
| J:       | 260 |
| L:       | 320 |
| N:       | 28  |
| $N_1$ :  | 22  |
| G:       | 20  |
| quality: | 10  |

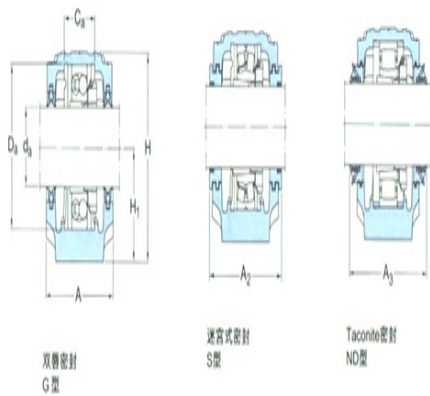

model

|  |              |
|--|--------------|
| Bearing seat with seals on both sides: | SNL517T<br>A |
| Component bearing seat:                | SNL517       |
| seal components:                       | TSN517A      |
| end cap:                               | ASNH517      |

diameter of axle

|         |  |
|---------|--|
| $d_a$ : |  |
|---------|--|

Hole


|         |  |
|---------|--|
| $C_a$ : |  |
| $D_a$ : |  |

Total width of the attached seal

|         |  |
|---------|--|
| $A_2$ : |  |
| $A_3$ : |  |

Applicable bearings and related parts

|                                  |  |
|----------------------------------|--|
| Automatic centering ball bearing |  |
| spherical roller bearing:        |  |

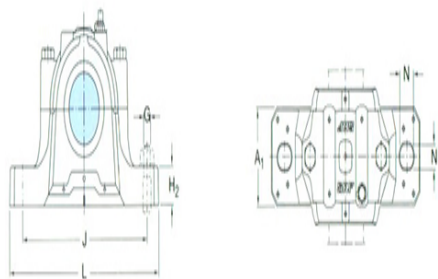

tapered adapter-  
sleeve:

Positioning rings  
2 per bearing seat  
:

Automatic centering ball  
bearing

spherical roller bearing  
CARB bearing:

tapered adapter-  
sleeve:

Positioning rings  
2 per bearing seat  
: