



Model: TSN516S

diameter of axle

| | |
|---------|----|
| d_a : | 70 |
|---------|----|

bearing block

| | |
|----------|-----|
| A: | 120 |
| A_1 : | 90 |
| H: | 177 |
| H_1 : | 95 |
| H_2 : | 32 |
| J: | 260 |
| L: | 315 |
| N: | 28 |
| N_1 : | 22 |
| G: | 20 |
| quality: | 9.5 |

model

| | |
|--|-------------|
| Bearing seat with seals on both sides: | SNL516TS |
| Component bearing seat: | SNL516-613 |
| seal components: | TSN516S |
| end cap: | ASNH516-613 |

diameter of axle

| | |
|---------|----|
| d_a : | 75 |
|---------|----|

Hole



| | |
|---------|-----|
| C_a : | 61 |
| D_a : | 150 |

Total width of the attached seal

| | |
|---------|-----|
| A_2 : | 143 |
| A_3 : | 210 |

Applicable bearings and related parts

| | |
|----------------------------------|-------|
| Automatic centering ball bearing | 1217K |
| spherical roller | |

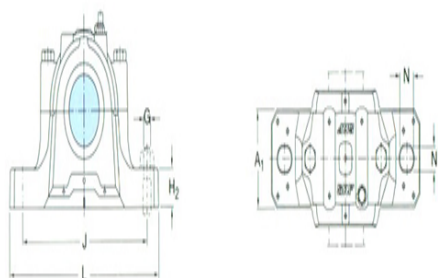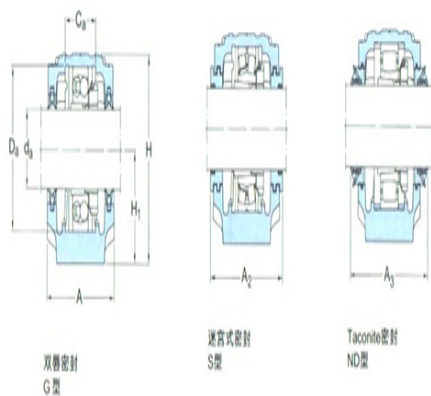

| | |
|--|-----------------|
| bearing: | |
| tapered adapter-sleeve: | H217 |
| Positioning rings 2 per bearing seat : | FRB16.5/15 0 |
| Automatic centering ball bearing spherical roller bearing CARB bearing: | 2217K |
| tapered adapter-sleeve: | H317 |
| Positioning rings 2 per bearing seat : | FRB12.5/15 0 |