




**Model: ASNH513-611**

diameter of axle

|         |    |
|---------|----|
| $d_a$ : | 55 |
|---------|----|

bearing block

|          |     |
|----------|-----|
| A:       | 95  |
| $A_1$ :  | 70  |
| H:       | 128 |
| $H_1$ :  | 70  |
| $H_2$ :  | 28  |
| J:       | 210 |
| L:       | 255 |
| N:       | 24  |
| $N_1$ :  | 18  |
| G:       | 16  |
| quality: | 4.2 |

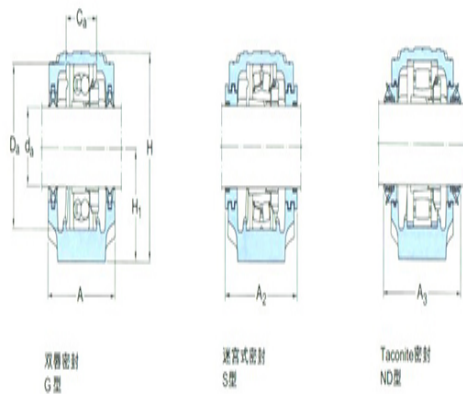

model

|  |                 |
|--|-----------------|
| Bearing seat with seals on both sides: | SNL211T<br>A    |
| Component bearing seat:                | SNL211          |
| seal components:                       | TSN211A         |
| end cap:                               | ASNH513<br>-611 |

diameter of axle

|         |    |
|---------|----|
| $d_a$ : | 55 |
| $d_b$ : | 65 |

Hole


|         |     |
|---------|-----|
| $C_a$ : | 51  |
| $D_a$ : | 120 |

Total width of the attached seal

|         |     |
|---------|-----|
| $A_2$ : | 122 |
| $A_3$ : | 185 |

Applicable bearings and related parts

|                          |   |
|--------------------------|---|
| Automatic centering ball | - |
|--------------------------|---|

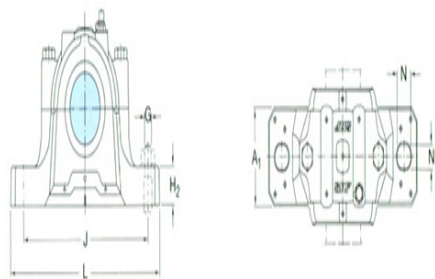

bearing

spherical roller bearing:

Positioning rings

2 per bearing seat -

:

Automatic centering ball

bearing

spherical roller bearing -

CARB bearing:

Positioning rings

2 per bearing seat -

: