




Model: TSN217S

diameter of axle

| | |
|---------|----|
| d_a : | 85 |
|---------|----|

bearing block

| | |
|------------------|-----|
| A: | 125 |
| A ₁ : | 90 |
| H: | 183 |
| H ₁ : | 95 |
| H ₂ : | 32 |
| J: | 260 |
| L: | 320 |
| N: | 28 |
| N ₁ : | 22 |
| G: | 20 |
| quality: | 9.5 |

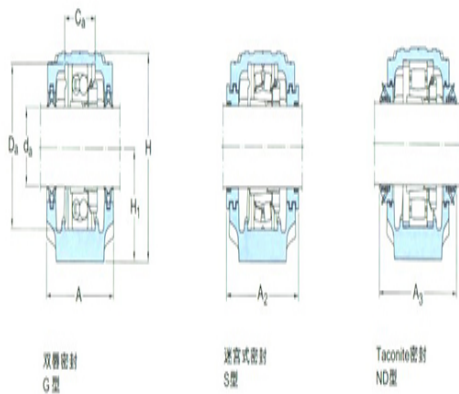

双唇密封
G型

迷宫式密封
S型

Tacconite密封
ND型

model

| | |
|--|----------|
| Bearing seat with seals on both sides: | SNL217TS |
| Component bearing seat: | SNL217 |
| seal components: | TSN217S |
| end cap: | ASNH217 |

diameter of axle

| | |
|---------|----|
| d_a : | 85 |
| d_b : | 95 |

Hole


| | |
|------------------|-----|
| C _a : | 61 |
| D _a : | 150 |

Total width of the attached seal

| | |
|------------------|-----|
| A ₂ : | 143 |
| A ₃ : | 205 |

Applicable bearings and related parts

| | |
|----------------------------------|---|
| Automatic centering ball bearing | - |
|----------------------------------|---|

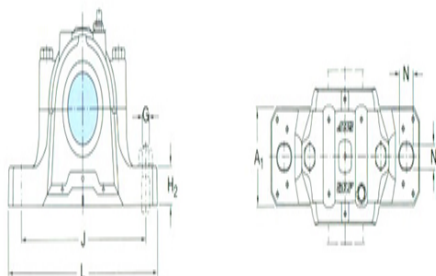

spherical roller
bearing:

Positioning rings
2 per bearing seat -
:

Automatic centering
ball bearing C2217
spherical roller bearing
CARB bearing:

Positioning rings FRB12.5/15
2 per bearing seat 0
: