




**Model: ASNH520-617**

diameter of axle

|         |    |
|---------|----|
| $d_a$ : | 85 |
|---------|----|

bearing block

|                  |      |
|------------------|------|
| A:               | 160  |
| A <sub>1</sub> : | 110  |
| H:               | 218  |
| H <sub>1</sub> : | 112  |
| H <sub>2</sub> : | 40   |
| J:               | 320  |
| L:               | 380  |
| N:               | 32   |
| N <sub>1</sub> : | 26   |
| G:               | 24   |
| quality:         | 17.6 |

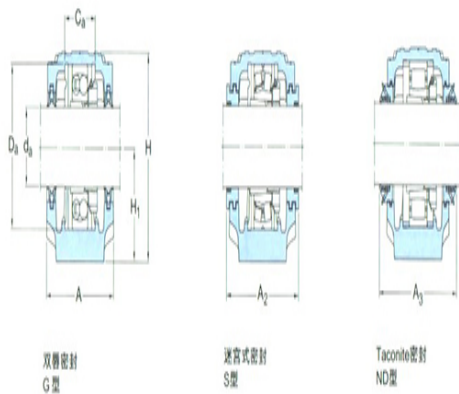

model

|  |             |
|--|-------------|
| Bearing seat with seals on both sides: | SNL317TS    |
| Component bearing seat:                | SNL520-617  |
| seal components:                       | TSN317S     |
| end cap:                               | ASNH520-617 |

diameter of axle

|         |     |
|---------|-----|
| $d_a$ : | 90  |
| $d_b$ : | 100 |

Hole


|         |     |
|---------|-----|
| $C_a$ : | 65  |
| $D_a$ : | 160 |

Total width of the attached seal

|                  |     |
|------------------|-----|
| A <sub>2</sub> : | 158 |
| A <sub>3</sub> : | 220 |

Applicable bearings and related parts

|                     |      |
|---------------------|------|
| Automatic centering | 1218 |
|---------------------|------|

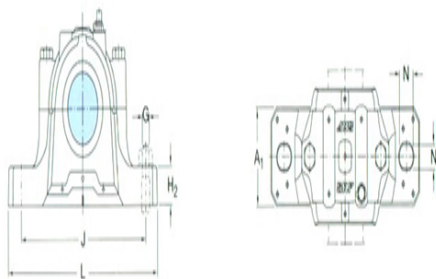

|                           |            |
|---------------------------|------------|
| ball bearing              |            |
| spherical roller bearing: |            |
| Positioning rings         | FRB17.5/16 |
| 2 per bearing seat        | 0          |
| :                         |            |
| Automatic centering       |            |
| ball bearing              | 2218       |
| spherical roller bearing  |            |
| CARB bearing:             |            |
| Positioning rings         | FRB12.5/16 |
| 2 per bearing seat        | 0          |
| :                         |            |