






WEH-CA

WEH17CA
 WEH21CA

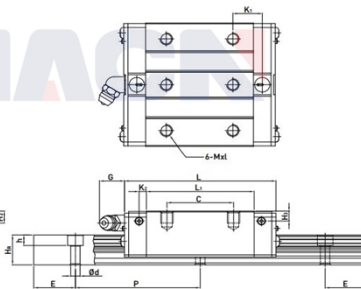

WEH27CA
 WEH35CA
 WEH50CA



Model: WEH35CA

Param

| | |
|-----------------------------------|--|
| Guide rail model: | WEH35CA |
| Slider special processing: | 无 |
| Number type of slider: | 单个 |
| Guide rail length L: | 440 |
| L computational formula: | $L=(n-1) \times P+2 \times E$ n=1,2,3.... |
| Special processing of guide rail: | 无 |
| Pre-pressure grade: | 无预压(ZO) |
| accuracy class: | 普通(C) |
| dustproof equipped with grade: | 标准防尘配备 |
| Dust equipped with: | 标准(刮油片+防尘片) |
| RC reinforced bolt cover: | 无 |
| Component size: | |
| H: | 35 |
| H1: | 4 |
| N: | 15.5 |
| Slider size: | |
| W: | 100 |
| B: | 76 |
| B1: | 12 |
| C: | 50 |
| L1: | 77.6 |
| L: | 102.6 |
| K1: | 18.35 |
| K2: | 5.25 |
| G: | 12 |

| | |
|--------------------------|-------|
| MxL: | M8x8 |
| T: | 13 |
| H2: | 8 |
| H3: | 6.5 |
| Guide track size: | |
| WR: | 69 |
| WB: | 40 |
| HR: | 19 |
| D: | 11 |
| h: | 9 |
| d: | 7 |
| P: | 80 |
| Standard end distance E: | 20 |
| Actual end distance: | 20 |
| Number of bolt holes n: | 6 |
| Guide rail fixed bolt: | M6x20 |
| Rated dynamic load C: | 29.80 |
| Rated static load Co: | 49.40 |
| Rated static moment MR: | 1.48 |
| Rated static moment, MP: | 0.67 |
| Rated static moment, MY: | 0.67 |
| Slider weight: | 1.10 |
| Guide rail weight: | 9.70 |