







PMN-C/PMN-H




PMN5C · PMN5H



PMN5HL

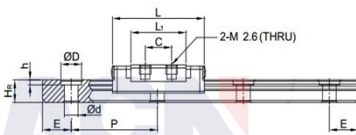

PMN9, PMN12



Model: PMN5HL

Param

Guide rail model:	PMN5HL
Slider special processing:	无
Number type of slider:	单个
Guide rail length L:	100
L computational formula:	$L=(n-1) \times P+2 \times E$ n=1,2,3....
Special processing of guide rail:	无
Pre-pressure grade:	普通间隙(ZF)
accuracy class:	普通(C)
Guide track material:	普通钢
dustproof equipped with grade:	标准防尘配备
Dust equipped with:	标准(刮油片)
Component size:	
H:	6
H1:	1.5
N:	3.5
Slider size:	
W:	12
B:	-
B1:	6
C:	7
L1:	12.6
L:	19
Gn:	0.8
MxL:	M2.6-THRU
H2:	1
Guide track size:	
WR:	5

HR:	3.6
D:	3.6
h:	0.8
d:	2.4
P:	15
Standard end distance E:	5
Actual end distance:	5
Number of bolt holes n:	7
Guide rail fixed bolt:	M2x6
Rated dynamic load C:	0.67
Rated static load Co:	1.08
Rated static moment MR:	2.60
Rated static moment, MP:	2.30
Rated static moment, MY:	2.30
Slider weight:	0.010
Guide rail weight:	0.15