







**PMN-C/PMN-H**




PMN5C · PMN5H



PMN5HL

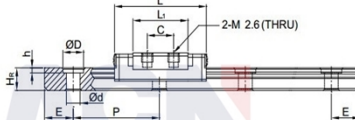

PMN9, PMN12



**Model: PMN9C**

**Param**

Guide rail model:	PMN9C
Slider special processing:	无
Number type of slider:	单个
Guide rail length L:	130
L computational formula:	$L=(n-1) \times P+2 \times E$ n=1,2,3....
Special processing of guide rail:	无
Pre-pressure grade:	普通间隙(ZF)
accuracy class:	普通(C)
Guide track material:	普通钢
dustproof equipped with grade:	标准防尘配备
Dust equipped with:	标准(刮油片)
Component size:	
H:	10
H1:	2.2
N:	5.5
Slider size:	
W:	20
B:	15
B1:	2.5
C:	10
L1:	19.4
L:	30
Gn:	φ 1.4
MxL:	M3x3
H2:	1.8
Guide track size:	
WR:	9

HR:	6.5
D:	6
h:	3.5
d:	3.5
P:	20
Standard end distance E:	7.5
Actual end distance:	15
Number of bolt holes n:	6
Guide rail fixed bolt:	M3x8
Rated dynamic load C:	2.01
Rated static load Co:	2.84
Rated static moment MR:	13.05
Rated static moment, MP:	8.97
Rated static moment, MY:	8.97
Slider weight:	0.012
Guide rail weight:	0.38