







PMN-C/PMN-H




PMN5C · PMN5H



PMN5HL

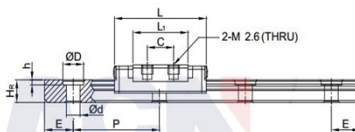

PMN9, PMN12



Model: PMN12C

Param

Guide rail model:	PMN12C
Slider special processing:	无
Number type of slider:	单个
Guide rail length L:	180
L computational formula:	$L=(n-1) \times P+2 \times E$ n=1,2,3....
Special processing of guide rail:	无
Pre-pressure grade:	普通间隙(ZF)
accuracy class:	普通(C)
Guide track material:	普通钢
dustproof equipped with grade:	标准防尘配备
Dust equipped with:	标准(刮油片)
RC reinforced bolt cover:	无
Component size:	
H:	13
H1:	3
N:	7.5
Slider size:	
W:	27
B:	20
B1:	3.5
C:	15
L1:	22
L:	35
Gn:	φ2
MxL:	M3x3.5
H2:	2.5

Guide track size:	
WR:	12
HR:	8
D:	6
h:	4.5
d:	3.5
P:	25
Standard end distance E:	10
Actual end distance:	15
Number of bolt holes n:	7
Guide rail fixed bolt:	M3x8
Rated dynamic load C:	2.84
Rated static load Co:	3.92
Rated static moment MR:	25.48
Rated static moment, MP:	13.72
Rated static moment, MY:	13.72
Slider weight:	0.025
Guide rail weight:	0.65