



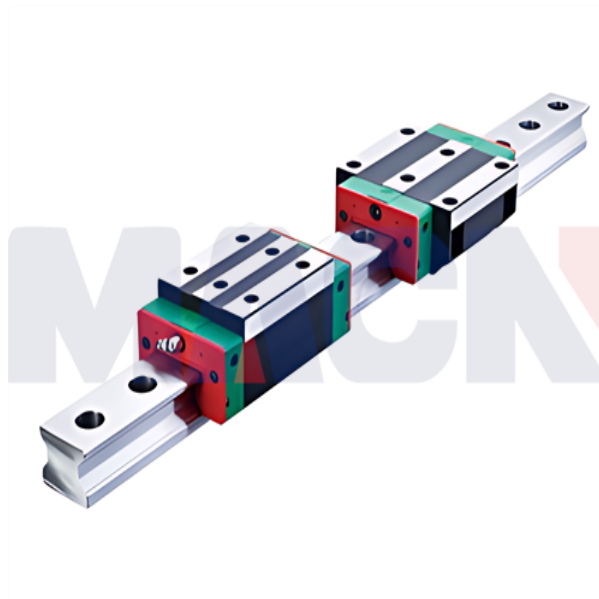

QRW-CC / QRW-HC

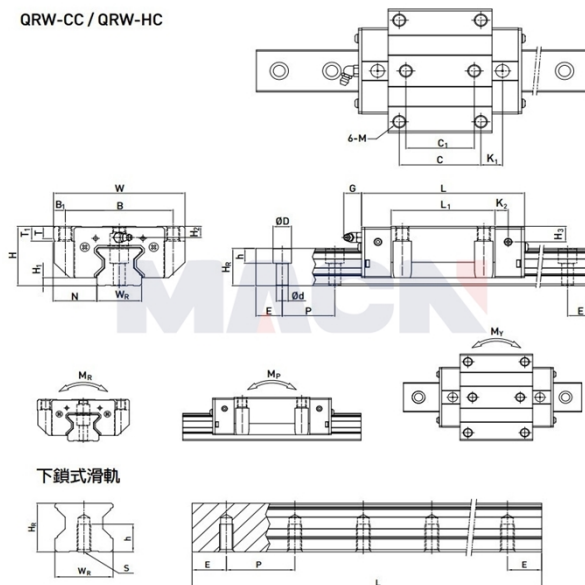

下鎖式滑軌

## Model: QRW20CC

### Param

|                                   |                                                   |
|-----------------------------------|---------------------------------------------------|
| Guide rail model:                 | QRW20CC                                           |
| Slider special processing:        | 无                                                 |
| Number type of slider:            | 单个                                                |
| Guide rail fixation mode:         | 上锁式                                               |
| Guide rail length L:              | 340                                               |
| L computational formula:          | $L=(n-1) \times P+2 \times E$<br>$n=1,2,3, \dots$ |
| Special processing of guide rail: | 无                                                 |
| Pre-pressure grade:               | 无预压(ZO)                                           |
| accuracy class:                   | 高(H)                                              |
| dustproof equipped with grade:    | 标准防尘配备                                            |
| Dust equipped with:               | 标准(刮油片+防尘片)                                       |
| Special selection:                | 无                                                 |
| RC reinforced bolt cover:         | 无                                                 |
| Component size:                   |                                                   |
| H:                                | 30                                                |
| H1:                               | 5                                                 |
| N:                                | 21.5                                              |
| Slider size:                      |                                                   |
| W:                                | 63                                                |
| B:                                | 53                                                |
| B1:                               | 5                                                 |
| C:                                | 40                                                |
| C1:                               | 35                                                |
| L:                                | 86                                                |

|                             |       |
|-----------------------------|-------|
| L1:                         | 57.5  |
| K1:                         | 13.8  |
| K2:                         | 6     |
| G:                          | 5.3   |
| M:                          | M6    |
| T:                          | 8     |
| T1:                         | 10    |
| H2:                         | 4.3   |
| H3:                         | 4.3   |
| Guide track<br>size:        |       |
| WR:                         | 20    |
| HR:                         | 21    |
| D:                          | 9.5   |
| h:                          | 8.5   |
| d:                          | 6     |
| P:                          | 30    |
| Standard end<br>distance E: | 20    |
| Actual end<br>distance:     | 20    |
| Number of bolt<br>holes n:  | 11    |
| Guide rail fixed<br>bolt:   | M5x16 |
| Rated dynamic<br>load C:    | 21.3  |
| Rated static<br>load Co:    | 46.7  |
| Rated static<br>moment MR:  | 0.647 |
| Rated static<br>moment, MP: | 0.46  |
| Rated static<br>moment, MY: | 0.46  |
| Slider weight:              | 0.47  |
| Guide rail<br>weight:       | 2.76  |