


QRH-CA / QRH-HA

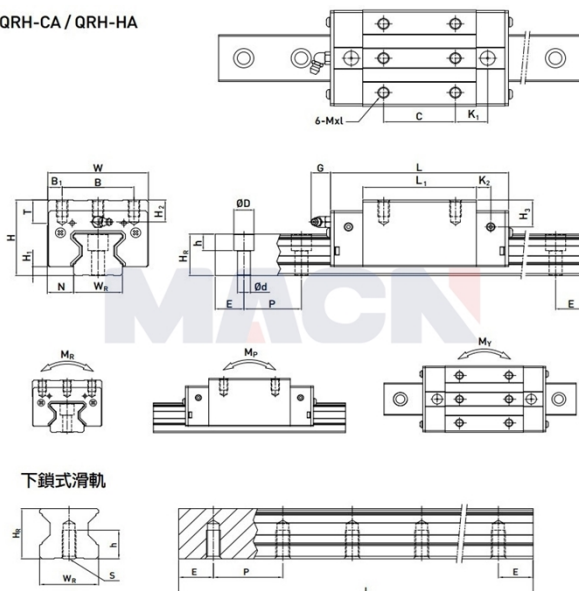

Model: QRH20CA

Param

Guide rail model:	QRH20CA
Slider special processing:	无
Number type of slider:	单个
Guide rail fixation mode:	上锁式
Guide rail length L:	340
L computational formula:	$L=(n-1) \times P+2 \times E$ $n=1,2,3, \dots$
Special processing of guide rail:	无
Pre-pressure grade:	无预压(ZO)
accuracy class:	高(H)
dustproof equipped with grade:	标准防尘配备
Dust equipped with:	标准(刮油片+防尘片)
Special selection:	无
RC reinforced bolt cover:	无
Component size:	
H:	34
H1:	5
N:	12
Slider size:	
W:	44
B:	32
B1:	6
C:	36
L:	86
L1:	57.5

K1:	15.8
K2:	6
G:	5.3
MxL:	M5x8
T:	8
H2:	8.3
H3:	8.3
Guide track size:	
WR:	20
HR:	21
D:	9.5
h:	8.5
d:	6
P:	30
Standard end distance E:	20
Actual end distance:	20
Number of bolt holes n:	11
Guide rail fixed bolt:	M5x20
Rated dynamic load C:	21.30
Rated static load Co:	46.70
Rated static moment MR:	0.65
Rated static moment, MP:	0.46
Rated static moment, MY:	0.46
Slider weight:	0.40
Guide rail weight:	2.76