



**型号: 61800-2Z**

**基本尺寸mm**

d:	10
D:	19
B:	5

**基本额定负荷kN**

动态 C:	1.38
静态 Co:	0.59
疲劳负荷极限 Pu:	0.025

**额定转速r/min**

参考转速:	80000
极限转速 <sup>1)</sup> :	38000
质量kg:	0.0055

**型号**

两侧带密封件:	61800-2Z
一侧带密封件:	-

**尺寸mm**



d:	10
d1 ~ :	12.6
d2 ~ :	-
D2 ~ :	17.3
r <sub>1,2</sub> 最小:	0.3

**挡肩及倒角尺寸mm**

d <sub>a</sub> 最小:	12
d <sub>a</sub> 最大:	-
Da 最大:	17
r <sub>a</sub> 最大:	0.3

**计算系数**

k <sub>r</sub> :	0.015
fo:	9.4

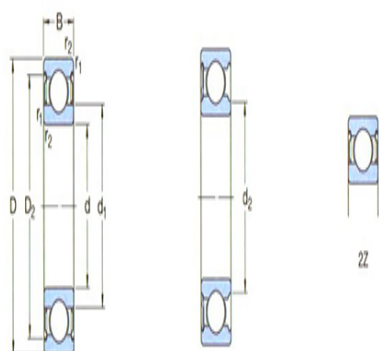



2RSH

