



**型号: 61900-2Z**

**基本尺寸mm**

d:	10
D:	22
B:	6

**基本额定负荷kN**

动态 C:	2.08
静态 Co:	0.85
疲劳负荷极限 Pu:	0.036

**额定转速r/min**

参考转速:	75000
极限转速 <sup>1)</sup> :	36000
质量kg:	0.01

**型号**

两侧带密封件:	61900-2Z
一侧带密封件:	-

**尺寸mm**



d:	10
d1 ~ :	13
d2 ~ :	-
D2 ~ :	19
r <sub>1,2</sub> 最小:	0.3

**挡肩及倒角尺寸mm**

d <sub>a</sub> 最小:	12
d <sub>a</sub> 最大:	-
Da 最大:	20
r <sub>a</sub> 最大:	0.3

**计算系数**

k <sub>r</sub> :	0.02
fo:	9.3

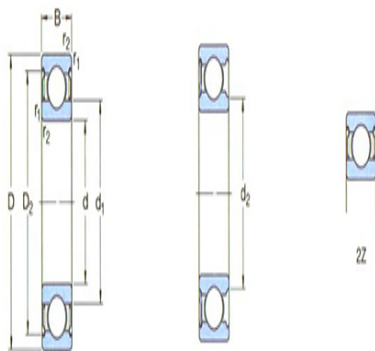



2RSH

