



型号: 61900-2RS1

基本尺寸mm

d:	10
D:	22
B:	6

基本额定负荷kN

动态 C:	2.08
静态 Co:	0.85
疲劳负荷极限 Pu:	0.036

额定转速r/min

参考转速:	-
极限转速 ¹⁾ :	20000
质量kg:	0.01

型号

两侧带密封件:	61900-2RS1
一侧带密封件:	-

尺寸mm



d:	10
d1 ~ :	-
d2 ~ :	12
D2 ~ :	19
r _{1,2} 最小:	0.3

挡肩及倒角尺寸mm

d _a 最小:	12
d _a 最大:	12
Da 最大:	20
r _a 最大:	0.3

计算系数

k _r :	0.02
f _o :	9.3

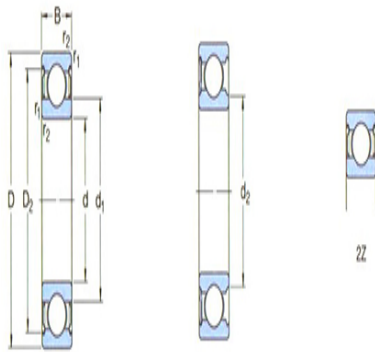



2RSH

