



型号: 6000-2RSH

基本尺寸mm

d:	10
D:	26
B:	8

基本额定负荷kN

动态 C:	4.75
静态 Co:	1.96
疲劳负荷极限 Pu:	0.083

额定转速r/min

参考转速:	-
极限转速 ¹⁾ :	19000
质量kg:	0.019

型号

两侧带密封件:	*6000-2RSH
一侧带密封件:	*6000-RSH

尺寸mm



d:	10
d1 ~ :	-
d2 ~ :	13
D2 ~ :	22.6
r _{1,2} 最小:	0.3

挡肩及倒角尺寸mm

d _a 最小:	12
d _a 最大:	12.5
Da 最大:	24
r _a 最大:	0.3

计算系数

k _r :	0.025
fo:	12

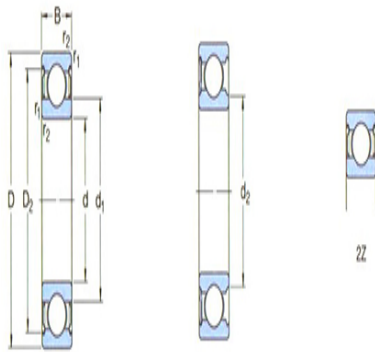



2RSH

