



型号: 6200-2RSL

基本尺寸mm

d:	10
D:	30
B:	9

基本额定负荷kN

动态 C:	5.4
静态 Co:	2.36
疲劳负荷极限 Pu:	0.1

额定转速r/min

参考转速:	56000
极限转速 ¹⁾ :	28000
质量kg:	0.032

型号

两侧带密封件:	*6200-2RSL
一侧带密封件:	*6200-RSL

尺寸mm



d:	10
d1 ~ :	-
d2 ~ :	15.2
D2 ~ :	24.8
r _{1,2} 最小:	0.6

挡肩及倒角尺寸mm

d _a 最小:	14.2
d _a 最大:	15
Da 最大:	25.8
r _a 最大:	0.6

计算系数

k _r :	0.025
fo:	13

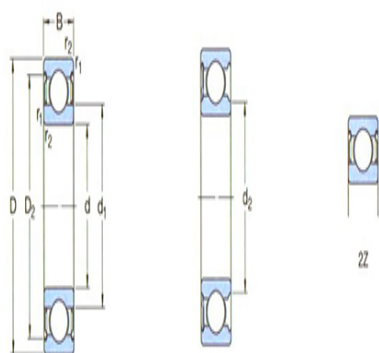



2RSH

