



型号：6200-2RSH

基本尺寸mm

| | |
|----|----|
| d: | 10 |
| D: | 30 |
| B: | 9 |

基本额定负荷kN

| | |
|------------|------|
| 动态 C: | 5.4 |
| 静态 Co: | 2.36 |
| 疲劳负荷极限 Pu: | 0.1 |

额定转速r/min

| | |
|----------------------|-------|
| 参考转速: | - |
| 极限转速 ¹⁾ : | 17000 |
| 质量kg: | 0.032 |

型号

| | |
|---------|------------|
| 两侧带密封件: | *6200-2RSH |
| 一侧带密封件: | *6200-RSH |

尺寸mm



| | |
|----------------------|------|
| d: | 10 |
| d1 ~ : | - |
| d2 ~ : | 15.2 |
| D2 ~ : | 24.8 |
| r _{1,2} 最小: | 0.6 |

挡肩及倒角尺寸mm

| | |
|--------------------|------|
| d _a 最小: | 14.2 |
| d _a 最大: | 15 |
| Da 最大: | 25.8 |
| r _a 最大: | 0.6 |

计算系数

| | |
|------------------|-------|
| k _r : | 0.025 |
| f _o : | 13 |

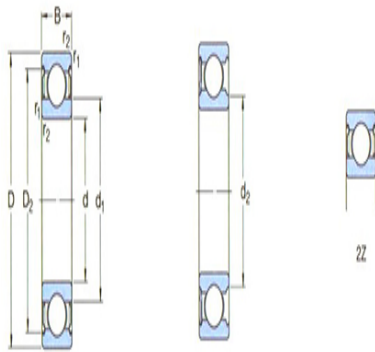



2RSH

