



**型号: 61901-2RS1**

**基本尺寸mm**

d:	12
D:	24
B:	6

**基本额定负荷kN**

动态 C:	2.25
静态 Co:	0.98
疲劳负荷极限 Pu:	0.043

**额定转速r/min**

参考转速:	-
极限转速 <sup>1)</sup> :	19000
质量kg:	0.011

**型号**

两侧带密封件:	61901-2RS1
一侧带密封件:	-

**尺寸mm**


d:	12
d1 ~ :	15.5
d2 ~ :	-
D2 ~ :	21.4
r <sub>1,2</sub> 最小:	0.3

**挡肩及倒角尺寸mm**

d <sub>a</sub> 最小:	14
d <sub>a</sub> 最大:	-
Da 最大:	22
r <sub>a</sub> 最大:	0.3

**计算系数**

k <sub>r</sub> :	0.02
f <sub>o</sub> :	9.7

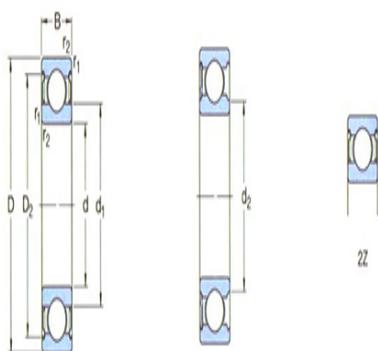



2RSH

