



### 型号: 6001-2Z

#### 基本尺寸mm

d:	12
D:	28
B:	8

#### 基本额定负荷kN

动态 C:	5.4
静态 Co:	2.36
疲劳负荷极限 Pu:	0.1

#### 额定转速r/min

参考转速:	60000
极限转速 <sup>1)</sup> :	30000
质量kg:	0.022

#### 型号

两侧带密封件:	*6001-2Z
一侧带密封件:	*6001-Z

#### 尺寸mm



d:	12
d1 ~ :	17
d2 ~ :	-
D2 ~ :	24.8
r <sub>1,2</sub> 最小:	0.3

#### 挡肩及倒角尺寸mm

d <sub>a</sub> 最小:	14
d <sub>a</sub> 最大:	-
Da 最大:	26
r <sub>a</sub> 最大:	0.3

#### 计算系数

k <sub>r</sub> :	0.025
fo:	13

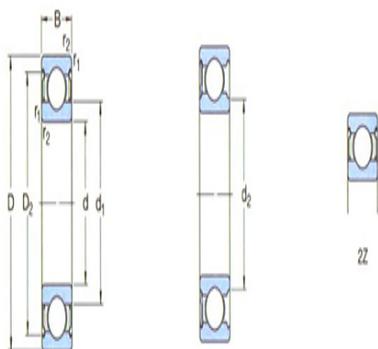



2RSH

