



型号: 6001-2RSL

基本尺寸mm

d:	12
D:	28
B:	8

基本额定负荷kN

动态 C:	5.4
静态 Co:	2.36
疲劳负荷极限 Pu:	0.1

额定转速r/min

参考转速:	60000
极限转速 ¹⁾ :	30000
质量kg:	0.022

型号

两侧带密封件:	*6001-2RSL
一侧带密封件:	*6001-RSL

尺寸mm



d:	12
d1 ~ :	-
d2 ~ :	15.2
D2 ~ :	24.8
r _{1,2} 最小:	0.3

挡肩及倒角尺寸mm

d _a 最小:	14
d _a 最大:	15
Da 最大:	26
r _a 最大:	0.3

计算系数

k _r :	0.025
fo:	13

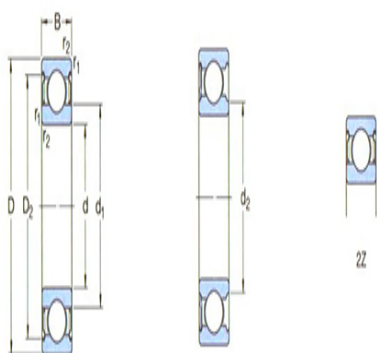



2RSH

