



型号: 16101-2Z

基本尺寸mm

d:	12
D:	30
B:	8

基本额定负荷kN

动态 C:	5.07
静态 Co:	2.36
疲劳负荷极限 Pu:	0.1

额定转速r/min

参考转速:	56000
极限转速 ¹⁾ :	28000
质量kg:	0.023

型号

两侧带密封件:	16101-2Z
一侧带密封件:	-

尺寸mm



d:	12
d1 ~ :	16.7
d2 ~ :	-
D2 ~ :	24.8
r _{1,2} 最小:	0.3

挡肩及倒角尺寸mm

d _a 最小:	14.4
d _a 最大:	-
Da 最大:	27.6
r _a 最大:	0.3

计算系数

k _r :	0.025
fo:	13

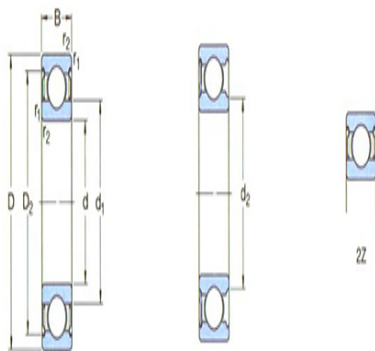



2RSH

