



### 型号: 16101-2RS1

#### 基本尺寸mm

d:	12
D:	30
B:	8

#### 基本额定负荷kN

动态 C:	5.07
静态 Co:	2.36
疲劳负荷极限 Pu:	0.1

#### 额定转速r/min

参考转速:	-
极限转速 <sup>1)</sup> :	16000
质量kg:	0.023

#### 型号

两侧带密封件:	16101-2RS1
一侧带密封件:	-

#### 尺寸mm



d:	12
d1 ~ :	16.7
d2 ~ :	-
D2 ~ :	24.8
r <sub>1,2</sub> 最小:	0.3

#### 挡肩及倒角尺寸mm

d <sub>a</sub> 最小:	14.4
d <sub>a</sub> 最大:	-
Da 最大:	27.6
r <sub>a</sub> 最大:	0.3

#### 计算系数

k <sub>r</sub> :	0.025
fo:	13

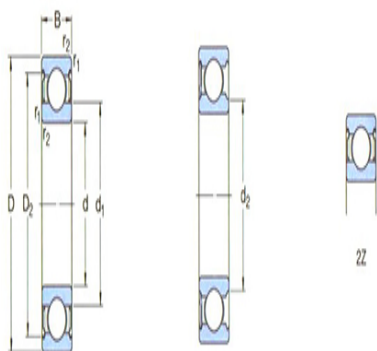



2RSH

